


BEFORE WE BEGIN

CONFIRM THE CORRECT SIZE OF YOUR PRINT OUT


When printing, make sure the Page Scaling is set to 'None' in print dialog box. Measure the bar to the right with a ruler to ensure your printout is properly sized, or place a quarter where indicated. The quarter should cover the image completely but not hang over any edges.

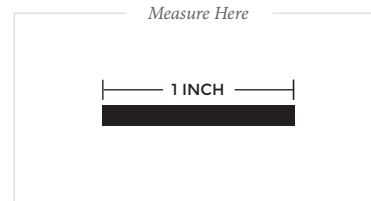

OPTION 1


USE A CURRENT RING

1. Find an existing ring that fits. (Make sure it is for the finger you intend for the new ring to be worn on.)
2. Place the ring on top of each circle until you find a perfect match. Match the inside edge of the ring to the circle nearest in size. This measurement refers to the inside diameter of the ring.
3. If the ring falls between two sizes, order the larger size.

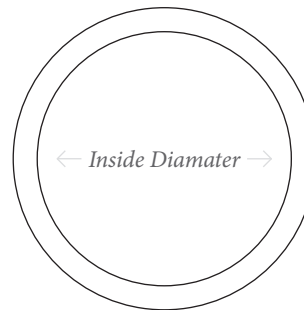

Remember:

MEASUREMENTS SHOULD MATCH THE INSIDE EDGE OF THE RING.

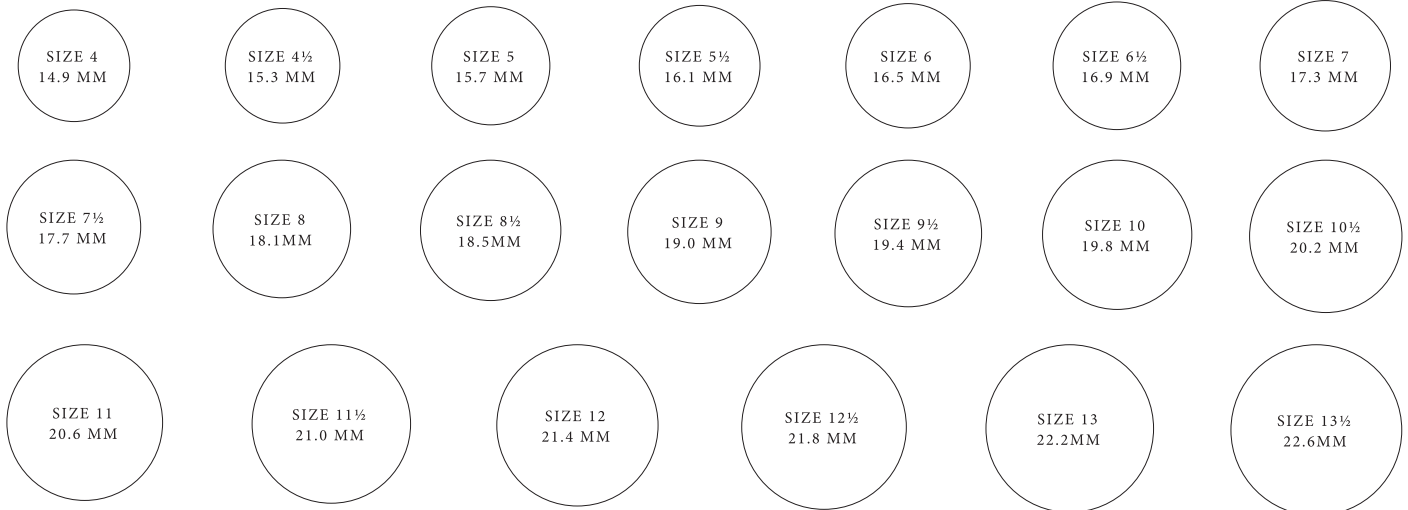

OPTION 2

USE SIZER TO MEASURE FINGER

1. Print and cut out the ring size strip to the right.
2. Wrap the sizer around the knuckle (or widest part) of the finger to be sized. Start by placing at the flat end of the strip on the finger, and wrap the arrow end around until the fit is snug.
3. Once wrapped, the number closest to the arrow point is the ring size. Hash marks between the numbers are half sizes. If in doubt, move up to the next largest half size.

